

## P Series IP Camera

# OND-P3611



Series	P Series 2MP, H.265, Fixed Iris, WDR, Dome Type
--------	--

### Camera

Image Sensor	1 / 2.7 "CMOS
Image Size	1920 x 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	0.05 lux @F1.2,AGC ON; 0 lux with IR
Lens	3.6 mm @F1.6, horizontal field of view : 80.3°
Lens Mount	M12
Day & Night	ICR
Wide Dynamic Range	120dB
Digital NR	3D DNR
Angle Adjustment	Any angle

### Image

Video Compression	H.265 / H.264 / MJPEG
H.265 Compression	Main Profile @Leve4.1 High Tier
Resolution	1080P ( 1920 x 1080 ), 720P ( 1280 x 720 ),D1, CIF, 480 x 240
Main Stream	60Hz : 1080P ( 1 ~ 30 fps ) / 720P ( 1 ~ 30 fps ) 50Hz : 1080P ( 1 ~ 25 fps ) / 720P ( 1 ~ 25 fps )
Bit Rate	128 Kbps ~ 6 Mbps
Bit Rate Type	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, sharpen, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately

### Interfaces

Network	RJ45
Audio	MIC IN x 1
Video Output	CVBS video output ( BNC x 1)


### Functions

Remote Monitoring	IE browsing,CMS remote control
Online Connection	Support simultaneous monitoring for up to 4 users ; Support multi-stream real time transmission
Network Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS,SMTP,FTP
Interface Protocol	ONVIF, GB-T / 28181 - 2011
Storage	Network remote storage
Smart Alarm	Motion alarm
Smart Analysis	Object removal detection, line crossing detection and intrusion detection, etc.
PoE	Yes
IR Distance	10 ~ 20m
Ingress Protection	IP66,IK10

### Others

Power Supply	DC12V ( PoE power supply optional )
Power Consumption	< 2W
IR Consumption ON	< 4W
Operating Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % relative humidity
Dimensions ( mm )	Ø87 x 108
Weight ( net )	422g
Installation	Pendent mounting

## 2 MP Network IR Water-proof Dome Camera

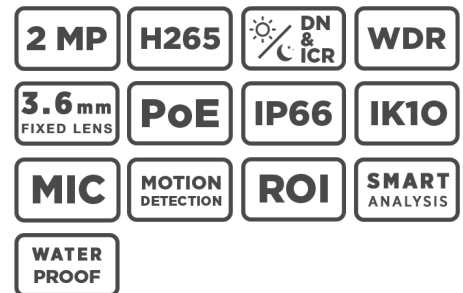

- \* 1080P ( 1920 x 1080 ) full real time coding
- \* Max.resolution : 1920 x 1080
- \* ICR auto switch, true day / night
- \* 10 ~ 20 m IR night view distance
- \* 3D DNR, physical WDR
- \* Smart analysis including object removal, line crossing detection and intrusion detection, etc.
- \* ROI coding
- \* Support CVBS video output and one-way audio
- \* PoE power supply optional
- \* Support smart phone, iPad, remote monitoring
- \* Support P2P
- \* IP66 ingress protection
- \* Support three streams

